

MP14.5-MP16E

Since 1994 Marapco Generating Sets have provided reliable, dependable and trustworthy power solutions for the global market. Marapco Generating Sets combine quality and performance to deliver a superior product, making Marapco a market leading Generating Set throughout the Middle East, Asia & Africa.

Generator Output Rating at - 60Hz						
220/127V	KVA		KW			
Prime	14.5		11.6			
Standby	16.0		12.8			
			@ 0.8 p.f.			
Generator Output Rating at - 60Hz						
380/220V	KVA		KW			
Prime	12.5		10.0			
Standby	14.0		11.2			
			@ 0.8 p.f.			
Engine Data						
Engine Data Engine Manufact	urer:	Perkins l	JK			
_	urer:	Perkins U				
Engine Manufact						
Engine Manufact	lers:	403D-15	5G			
Engine Manufact Engine Model: Number of Cylind	lers:	403D-15	5G Line			
Engine Manufact Engine Model: Number of Cylind Cylinder Arranger	lers: ment:	403D-15 3 Vertical In	5G Line e			
Engine Manufact Engine Model: Number of Cylind Cylinder Arranger Cycle:	lers: ment: (in): 84.	403D-15 3 Vertical In 4 Strok	Eline e 0.0 (3.5)			
Engine Manufact Engine Model: Number of Cylind Cylinder Arranger Cycle: Bore/Stroke mm	lers: ment: (in): 84.	403D-15 3 Vertical In 4 Strok 4 (3.3) x 90	Line e 0.0 (3.5) pirated			

General Data					
Liter	US/Gal				
100.0	26.4				
UV Resistant MDPE					
Heavy Duty-Powder Coated					
Deep Sea Electronics 6110					
ABB 3 Pole MCB					
	100.0 UV Resista Heavy Duty-Po Deep Sea Elec				

Performance	60	HZ	
Engine Speed:	1800		
Gross Engine Power:	kWm	Bhp	
Prime:	14.7	19.7	
Standby:	16.2	21.7	
Fuel Consumption:	L/Hr	US Gal/Hr	
Prime:	3.7	0.98	
Standby:	4.1	1.1	

Standard Reference Conditions:

Output ratings are presented at normal conditions of temperature and pressure. This generator set is designed to operate in high ambient temperatures and altitudes.

Please consult your dealer for specific site ratings.

Dim	anei	inne a	nd V	Veiahts

Len	gth	Wie	dth	Hei	ght	I	Dry		Wet
Millimeter	Inch	Millimeter	Inch	Millimeter	Inch	KG	LB	KG	LB
1386.0	52.2	720.0	28.3	1265.0	46.7	452.0	996.5	460.0	1014.1
						* With Lube Oil		* With Lube Oil	& Coolant

Rating Definition



These rating are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours.



These rating are applicable for supply continuous electrical power (at variable load) in the event of utility power failure. No *overload is permitted on these ratings. The* alternator model is peak continuous rated (as *defined in ISO 8528-3*)

Air Flow	60Hz		
		M³/min	Ft³/min
Combustion Air Flow:		1.23	43.43
Exhaust Gas Flow:		3.36	118.66
Radiator Cooling: Air Flow		43.2	1525.6

^{*}Cooling system designed to operate in high ambient conditions

Alternator Data Alternator Manufacturer: **Leroy Somer Alternator Model:** LSA40VS2 **Number of Bearings:** Single (1) **Insulation Class:** Н **Total Harmonic Content:** at no load <3% Wires: 12 **Ingress Protection Rating:** IP 23 **Excitation System:** Shunt **Winding Pitch Code:** 2/3 - 6



Perkins manufactures diesel engines and power solutions to the highest levels of performance and reliability. MARAPCO incorporates this engine throughout their full range.




Leroy Somer is a world leader in the manufacturing of power generation, combining quality with performance to produce a market leading alternator for MARAPCO.



Deep Sea Electronics control modules deliver unrivaled functionality and performance. MARAPCO generating sets use this latest technology to its full potential.

 $Logos\ and\ Brands\ of\ Perkins,\ Leroy\ Somer,\ ABB\ \&\ Deep\ Sea\ Electronics\ \ are\ registered\ Trademarks$

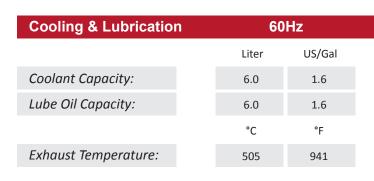



Other Information

Generating Set Standards

This generating set meets the following standards: ISO8528, BS4999, BS5514, IEC60034, VDE0530

Warranty

This generator is covered against manufacturing and workmanship defects. Kindly refer to warranty statement for more details.

Picture shown in leaflet may include optional accessories, all data is correct at the time of process and we reserve the right to change specification without prior notice

Distributed & Serviced by:



0405/2020