



MP1880E

Since 1994 Marapco Generating Sets have provided reliable, dependable and trustworthy power solutions for the global market. Marapco Generating Sets combine quality and performance to deliver a superior product, making Marapco a market leading Generating Set throughout the Middle East, Asia & Africa.

Generator Output Ra	ating at -	50H	z			
400V	KVA		KW			
Prime 1	710.0		1368.0			
Standby 18	1880.0		1504.0			
			@ 0.8 p.f.			
Generator Output Rating at - 60Hz						
480V	KVA		KW			
Prime	N/A		N/A			
Standby	N/A		N/A			
			@ 0.8 p.f.			
Engine Data						
Engine Manufacturer:	F	erkir	Perkins UK			
Engine Model:	402	12-46	STAG3A			
Engine Model: Number of Cylinders:	403	12-46 17				
	40:		2			
Number of Cylinders:	403	12	2 /ee			
Number of Cylinders: Cylinder Arrangement:		12 60 \ 4 Str	2 /ee			
Number of Cylinders: Cylinder Arrangement: Cycle:	160.0 ((Turbo ch	17 60 \ 4 Str 5.3) /	2 /ee roke			
Number of Cylinders: Cylinder Arrangement: Cycle: Bore/Stroke mm (in):	160.0 ((Turbo ch	17 60 \ 4 Str 5.3) /	2 /ee oke 190.0 (7.5) d & air to air cooled			

General Data				
	Liter	US/Gal		
Fuel Tank Capacity:	N/A	N/A		
Fuel Tank:	N/A			
Base Frame:	Heavy Duty-Powder Coated			
Control Panel:	Deep Sea Electronics			
Circuit Breaker:	ABB 3 Pole MCB			

Performance	50Hz	60HZ	
Engine Speed:	1500	1800	
Gross Engine Power:	kWm Bhp	kWm Bhp	
Prime:	1500.0 2012.0	N/A N/A	
Standby:	1643.0 2203.0	N/A N/A	
Fuel Consumption:	L/Hr US Gal/Hr	L/Hr US Gal/Hr	
Prime:	370.0 97.7	N/A N/A	
Standby:	405.0 107.0	N/A N/A	
333113137	10010 20710	,,,	

Standard Reference Conditions:

Output ratings are presented at normal conditions of temperature and pressure. This generator set is designed to operate in high ambient temperatures and altitudes.

Please consult your dealer for specific site ratings.

Dimensions and Weights

Len	gth	Wi	dth	He	eight		Dry		Wet
Millimeter	Inch	Millimeter	Inch	Millimeter	Inch	KG	LB	KG	LB
5300.0	280.7	2200.0	87.0	2680.0	105.6	10890	24008	11095	24460
					* With Lube Oil		* With Lube Oi	I & Coolant	

Rating Definition



These rating are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours.



These rating are applicable for supply continuous electrical power (at variable load) in the event of utility power failure. No *overload is permitted on these ratings. The* alternator model is peak continuous rated (as *defined in ISO 8528-3*)

Air Flow	50Hz	60Hz		
	M³/min Ft³/min	M³/min Ft³/min		
Combustion Air Flow:	135.0 4768	N/A N/A		
Exhaust Gas Flow:	350.0 12360	N/A N/A		
Radiator Cooling: Air Flow	2220.0 78399	N/A N/A		

^{*}Cooling system designed to operate in high ambient conditions

Alternator Data **Alternator Manufacturer: Leroy Somer** LSA52.3 S5 **Alternator Model: Number of Bearings:** Single (1) **Insulation Class:** Н **Total Harmonic Distortion:** < 4% Wires: **Ingress Protection Rating:** IP 23 **Excitation System:** AREP + PMI **Winding Pitch Code:** 2/3 - 6S



Perkins manufactures diesel engines and power solutions to the highest levels of performance and reliability. MARAPCO incorporates this engine throughout their full range.




Leroy Somer is a world leader in the manufacturing of power generation, combining quality with performance to produce a market leading alternator for MARAPCO.



Deep Sea Electronics control modules deliver unrivaled functionality and performance. MARAPCO generating sets use this latest technology to its full potential.

 $Logos\ and\ Brands\ of\ Perkins,\ Leroy\ Somer,\ ABB\ \&\ Deep\ Sea\ Electronics\ \ are\ registered\ Trademarks$

Cooling & Lubrication	50Hz		60Hz	
	Liter	US/Gal	Liter	US/Gal
Coolant Capacity:	210.0	55.5	N/A	N/A
Lube Oil Capacity:	177.0	46.8	N/A	N/A
	°C	°F	°C	°F
Exhaust Temperature:	480	896	N/A	N/A

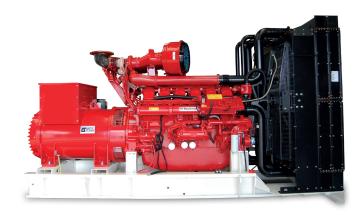

Other Information

Generating Set Standards

This generating set meets the following standards: ISO8528, BS4999, BS5514, IEC60034, VDE0530

Warranty

This generator is covered against manufacturing and workmanship defects. Kindly refer to warrant statement for more details.

Picture shown in leaflet may include optional accessories

Distributed & Serviced by:



JAN2014 VER.1