



MP700E

Since 1994 Marapco Generating Sets have provided reliable, dependable and trustworthy power solutions for the global market. Marapco Generating Sets combine quality and performance to deliver a superior product, making Marapco a market leading Generating Set throughout the Middle East, Asia & Africa.

Generator Output Rating at - 50Hz					
400V	KVA	KW			
Prime	650.0	520.0			
Standby	700.0	560.0			
		@ 0.8 p.f.			
Generator Outp	out Rating at	- 60Hz			
480V	KVA	KW			
Prime	625.0	500.0			
Standby	687.0	550.0			
		@ 0.8 p.f.			
Engine Data					
Engine Manufactu	urer:	Perkins USA			
Engine Model:	28	2806A-E18TAG2			
Number of Cylind	ers:	6			
Cylinder Arranger	ment: Ve	Vertical In Line			
Cycle:		4 Stroke			
Bore/Stroke mm ((in): 145.0	145.0 (5.7) / 183.0 (7.2)			
Induction:		harged & air-to-air harge cooled			
	C	narge coolea			
Compression ratio		14.5:1			

General Data			
	Liter	US/Gal	
Fuel Tank Capacity:	1250.0	330.2	
Fuel Tank:	Powder Coated Steel		
Base Frame:	Heavy Duty-Powder Coated		
Control Panel:	Deep Sea Electronics		
Circuit Breaker:	ABB 3 Pole MCB		

Engine Speed: 1500	18		
Engine Speed: 1500	1800		
Gross Engine Power: kWm Bhp kV	Vm	Bhp	
Prime: 584.0 783.1 56	7.7	761.3	
Standby: 628.0 842.1 62	3.0	835.4	
Fuel Consumption: L/Hr us Gal/Hr L/	'Hr	US Gal/Hr	
Prime: 132 34.87 1	27	35.55	
Standby: 143 37.78 1	41	37.25	

Standard Reference Conditions:

Output ratings are presented at normal conditions of temperature and pressure. This generator set is designed to operate in high ambient temperatures and altitudes.

Please consult your dealer for specific site ratings.

Dimensions and Weights

Len	gth	Wi	dth	He	eight	I	Dry	1	Wet
Millimeter	Inch	Millimeter	Inch	Millimeter	Inch	KG	LB	KG	LB
3919.0	154.3	1536.0	60.5	2229.0	87.8	4362.0	9616.6	4470.0	9854.7

Rating Definition



Prime Rating

These rating are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours.



Standby Rating

These rating are applicable for supply continuous electrical power (at variable load) in the event of utility power failure. No *overload is permitted on these ratings. The* alternator model is peak continuous rated (as *defined in ISO 8528-3*)

Air Flow	50Hz	60Hz		
	M³/min Ft³/min	M³/min Ft³/min		
Combustion Air Flow:	40.0 1413	45.0 1589		
Exhaust Gas Flow:	114.0 4026	118.0 4167		
Radiator Cooling: Air Flow	702.0 24791	852.0 30088		

^{*}Cooling system designed to operate in high ambient conditions

Alternator Data

7 HOHILATO I DATA	
Alternator Manufacturer:	Leroy Somer
Alternator Model:	LSA 49.3 S4 <i>TAL047F</i>
Number of Bearings:	Single (1)
Insulation Class:	Н
Total Harmonic Distortion:	< 4% < 5%
Wires:	12 6
Ingress Protection Rating:	IP 23
Excitation System:	Shunt
Winding Pitch Code:	2/3 - 6



Perkins manufactures diesel engines and power solutions to the highest levels of performance and reliability. MARAPCO incorporates this engine throughout their full range.




Leroy Somer is a world leader in the manufacturing of power generation, combining quality with performance to produce a market leading alternator for MARAPCO.



Deep Sea Electronics control modules deliver unrivaled functionality and performance. MARAPCO generating sets use this latest technology to its full potential.

 $Logos\ and\ Brands\ of\ Perkins,\ Leroy\ Somer,\ ABB\ \&\ Deep\ Sea\ Electronics\ \ are\ registered\ Trademarks$

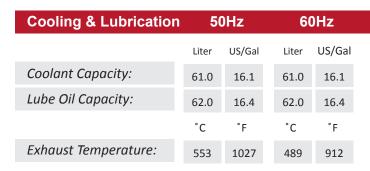



Other Information

Generating Set Standards

This generating set meets the following standards: ISO8528, BS4999, BS5514, IEC60034, VDE0530

Warranty

This generator is covered against manufacturing and workmanship defects. Kindly refer to warrant statement for more details.

Picture shown in leaflet may include optional accessories

Distributed & Serviced by:



JAN2014 VER.1