

# **MP800E**

Since 1994 Marapco Generating Sets have provided reliable, dependable and trustworthy power solutions for the global market. Marapco Generating Sets combine quality and performance to deliver a superior product, making Marapco a market leading Generating Set throughout the Middle East, Asia & Africa.

Generator Outp	ut Rating at	- 50Hz
	KVA	KW
Prime	725.0	580.0
Standby	800.0	640.0
		@ 0.8 p.f.
Generator Outp	out Rating at	: - 60Hz
480V	KVA	KW
Prime	725.0	580.0
Standby	800.0	640.0
		@ 0.8 p.f.
Engine Data		
Engine Manufactu	urer:	Perkins UK
Engine Manufactu Engine Model:		Perkins UK 006-23TAG2A
-	4	
Engine Model:	4 ers:	006-23TAG2A
Engine Model: Number of Cylind	4 ers:	006-23TAG2A 6
Engine Model: Number of Cylind Cylinder Arranger	4 ers: nent: V	006-23TAG2A 6 /ertical In Line
Engine Model: Number of Cylind Cylinder Arranger Cycle:	4 ers: nent: V ( <i>in</i> ): 160.0 Turbo (	006-23TAG2A 6 /ertical In Line 4 Stroke
Engine Model: Number of Cylind Cylinder Arranger Cycle: Bore/Stroke mm (	4 ers: nent: V (in): 160.0 Turbo ( C	006-23TAG2A 6 /ertical In Line 4 Stroke (6.3) / 190.0 (7.5) charged & air-to-air

# **General Data**

	Liter	US/Gal			
Fuel Tank Capacity:	N/A	N/A			
Fuel Tank:	N/A				
Base Frame:	Heavy Duty-Powder Coated				
Control Panel:	Deep Sea Electronics				
Circuit Breaker:	ABB 3 Pole MCB				

Performance	50	Hz	60HZ		
Engine Speed:	150	1500		800	
Gross Engine Power:	kWm	kWm Bhp		Bhp	
Prime:	658.0	882.0	682.0	914.6	
Standby:	721.0 967.0		746.0	1000.0	
Fuel Consumption:	L/Hr	US Gal/Hr	L/Hr	US Gal/Hr	
Prime:	155.0	41.0	176.0	46.5	
Standby:	169.0	44.6	196.0	51.8	

# **Standard Reference Conditions:**

Output ratings are presented at normal conditions of temperature and pressure. This generator set is designed to operate in high ambient temperatures and altitudes.

Please consult your dealer for specific site ratings.

Dimensions and Weights										
Length Width Height Dry							Wet			
Millimeter	Inch	Millimeter	Inch	Millimeter	Inch		KG	LB	KG	LB
4554.0	179.3	1933.0	76.1	2234.0	91.9		4930.0	10869.0	5080.0	11200.0
* With Lube Oil * With Lube Oil & Coolant							l & Coolant			

**Marapco Ltd** 8 Meadowbank Rd - Carrickfergus - N. Ireland - U.K. BT38 8YF Tel: +44 (0) 2893 355674 - www.marapco.com - Email: sales@marapco.com

# **Rating Definition**

# P Prime Rating

These rating are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours.

# Standby Rating

These rating are applicable for supply continuous electrical power (at variable load) in the event of utility power failure. No *overload is permitted on these ratings. The* alternator model is peak continuous rated (as *defined in ISO 8528-3*)

Air Flow	50Hz		60Hz	
	M∛min	M³∕min Ft³⁄min		Ft∛min
Combustion Air Flow:	71.0	2507	72.0	2543
Exhaust Gas Flow:	180.0	6357	190.0	6710
Radiator Cooling: Air Flow	1200.0	42378	1320.0	46615

\*Cooling system designed to operate in high ambient conditions

Alternator Data	
Alternator Manufacturer:	Leroy Somer
Alternator Model:	LSA 49.3 M6   TAL049B
Number of Bearings:	Single (1)
Insulation Class:	Н
Total Harmonic Content:	<b>&lt; 4%</b>   <i>&lt;</i> 5%
Wires:	6
Ingress Protection Rating:	IP 23
Excitation System:	AREP   Shunt
Winding Pitch Code:	2/3 - 6S



Perkins manufactures diesel engines and power solutions to the highest levels of performance and reliability. MARAPCO incorporates this engine throughout their full range.



Leroy Somer is a world leader in the manufacturing of power generation, combining quality with performance to produce a market leading alternator for MARAPCO.



Deep Sea Electronics control modules deliver unrivaled functionality and performance. MARAPCO generating sets use this latest technology to its full potential.

Logos and Brands of Perkins, Leroy Somer, ABB & Deep Sea Electronics are registered Trademarks

<b>Cooling &amp; Lubrication</b>	5(	)Hz	60Hz		
	Liter	US/Gal	Liter	US/Gal	
Coolant Capacity:	105	27.7	105.0	27.7	
Lube Oil Capacity:	113.0	30.0	113.0	30.0	
	°C	°F	°C	°F	
Exhaust Temperature:	430	806	430	806	



#### **Other Information**

### **Generating Set Standards**


This generating set meets the following standards: ISO8528, BS4999, BS5514, IEC60034, VDE0530

### Warranty

This generator is covered against manufacturing and workmanship defects. Kindly refer to warrant statement for more details.

Picture shown in leaflet may include optional accessories

### Distributed & Serviced by:

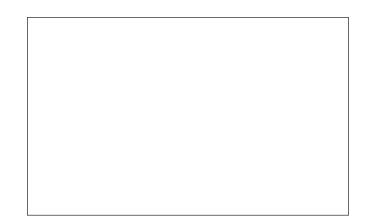

JAN2014 VER.1

Marapco Ltd 8 Meadowbank Rd - Carrickfergus - N. Ireland - U.K. BT38 8YF Tel: +44 (0) 2893 355674 - www.marapco.com - Email: sales@marapco.com