

# MP290-MP320E

Since 1994 Marapco Generating Sets have provided reliable, dependable and trustworthy power solutions for the global market. Marapco Generating Sets combine quality and performance to deliver a superior product, making Marapco a market leading Generating Set throughout the Middle East, Asia & Africa.

Generator Output Rating at - 60Hz					
220/127V	KVA	KW			
Prime	290.0	232.0			
Standby	320.0	256.0			
		@ 0.8 p.f.			
Generator Output I	Rating at	- 60Hz			
380/220V	KVA	KW			
Prime	275.0	220.0			
Standby	303.0	242.4			
		@ 0.8 p.f.			
Engine Data					
Engine Manufacturer	: Pe	Perkins Seguin			
		•			
Engine Model:	15	06A-E88TAG3			
Engine Model: Number of Cylinders:	_	06A-E88TAG3			
•					
Number of Cylinders:		6			
Number of Cylinders: Cylinder Arrangemen	t: Ve	6 ertical In Line			
Number of Cylinders: Cylinder Arrangemen Cycle:	t: Ve	6 ertical In Line 4 Stroke			
Number of Cylinders: Cylinder Arrangemen Cycle: Bore/Stroke mm (in):	t: Ve	6 ertical In Line 4 Stroke (4.4) / 149.0 (5.9) arged & air - to - air			

Liter	US/Gal			
600	158.5			
UV Resistant MDPE				
Heavy Duty-Powder Coated				
Deep Sea Electronics				
ABB 3 Pole MCCB				
	600  UV Resist  Heavy Duty-Po  Deep Sea E			

601	ΗZ		
1800			
kWm	Bhp		
270.0	362.1		
297.0	398.3		
L/Hr	US Gal/Hr		
63.1	16.7		
69.8	18.4		
	180 kWm 270.0 297.0 L/Hr 63.1		

#### **Standard Reference Conditions:**

Output ratings are presented at normal conditions of temperature and pressure. This generator set is designed to operate in high ambient temperatures and altitudes.

Please consult your dealer for specific site ratings.

## **Dimensions and Weights**

Length		h Wid		dth Height		I	Dry		Wet
Millimeter	Inch	Millimeter	Inch	Millimeter	Inch	KG	LB	KG	LB
3500.0	137.8	1096.0	43.1	1820.0	71.6	2435.0	5368.2	2465.0	5434.4
						* With Lube Oil		* With Lube Oil	& Coolant

### **Rating Definition**



These rating are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours.



These rating are applicable for supply continuous electrical power (at variable load) in the event of utility power failure. No *overload is permitted on these ratings. The* alternator model is peak continuous rated (as *defined in ISO 8528-3*)

Air Flow 60Hz			
		M³/min	Ft³/min
Combustion Air Flow:		19.8	699.2
Exhaust Gas Flow:		48.9	1726.9
Radiator Cooling: Air Flow		482.0	17021.6

<sup>\*</sup>Cooling system designed to operate in high ambient conditions

#### **Alternator Data** Alternator Manufacturer: **Leroy Somer Alternator Model:** LSA46.2M7 **Number of Bearings:** Single (1) **Insulation Class:** Н **Total Harmonic Content:** <2.5% Wires: 12 **Ingress Protection Rating:** IP 23 Shunt **Excitation System: Winding Pitch Code:** 2/3 - 6



Perkins manufactures diesel engines and power solutions to the highest levels of performance and reliability. MARAPCO incorporates this engine throughout their full range.




Leroy Somer is a world leader in the manufacturing of power generation, combining quality with performance to produce a market leading alternator for MARAPCO.



Deep Sea Electronics control modules deliver unrivaled functionality and performance. MARAPCO generating sets use this latest technology to its full potential.

 $Logos\ and\ Brands\ of\ Perkins,\ Leroy\ Somer,\ ABB\ \&\ Deep\ Sea\ Electronics\ \ are\ registered\ Trademarks$ 

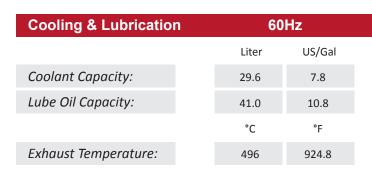



## **Other Information**

#### **Generating Set Standards**

This generating set meets the following standards: ISO8528, BS4999, BS5514, IEC60034, VDE0530

#### Warranty

This generator is covered against manufacturing and workmanship defects. Kindly refer to warranty statement for more details.

Picture shown in leaflet may include optional accessories, all data is correct at the time of process and we reserve the right to change specification without prior notice

#### Distributed & Serviced by:

24/04/2020