

Output Ratings

Generating Set Model	MP60	MP66E
380 – 415V, 50 Hz	60.0 KVA	66.0 KVA
	48.0 kW	52.8 kW
480V, 60 Hz	68.0 KVA	75.0 KVA
	54.0 kW	60.0 kW

Ratings at 0.8 pf

Ratings Definitions

Prime Power – Model MP60

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power.

Standby Power – Model MP66E

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure for 1 hour in 12 hours. No overload is permitted on these ratings. The alternator model is peak continuous rated (as defined in ISO 8528-3).

Technical Data

Engine Make/Model:	Perkins 1103A-33TG2	
Alternator Make/Model:	Leroy Somer LSA42.3 L9	
No. of Cylinders/Alignment:	3 in-line	
Displacement: Litres (cu.in)	3.30 (201.4)	
Bore and Stroke: mm (in)	105.0 (4.1) x 127.0 (5.0)	
Compression ratio:	17.25:1	
Induction:	Turbocharged	
Frequency:	50 Hz	60 Hz
Engine Speed: (rpm)	1500	1800
Gross Engine Standby Power: kW	60.5 (81.1)	69.6 (93.3)
Gross Engine Prime Power: kW	55.0 (73.8)	63.3 (84.9)
Coolant Capacity: Litres	10.2	10.2
Lube Oil Capacity: Litres	8.3	8.3
Fuel Tank Capacity: Litres (US Gal)	220 (58.1)	220 (58.1)
Fuel Consump, Prime : L/hr (USg/hr)	13.90 (3.67)	16.6 (4.386)
Fuel Consump, Standby: L/hr (USg/hr)	15.40 (4.07)	18.2 (4.808)
Exhaust Gas Flow m3/min (Ft3/min)	10.4 (367)	12.5 (441)
Radiator Cooling Air Flow m3/min (Ft3/min)	89.0 (3143)	111.0 (3920)
Exhaust Temperature: °C (°F)	571 (1060)	564 (1047)
Combustion Air Flow: m3/min (Ft3/min)	3.90 (138)	4.9 (173)

Overview

Standard reference conditions: 25deg C (77deg F) air inlet temperature, 152.4m (500feet) above sea level, 60% relative humidity. All engine performance data based on the above mentioned maximum continuous ratings. Fuel consumption data at full load for diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, class A2.

Generating set pictured may include optional accessories.

Contact your local Marapco dealer for power ratings at specific site conditions.

Marapco Ltd

Tel / Fax : 0044 2893 355674

Website: www.marapco.com

N. Ireland - UK

In line with our policy of continuous product development, we reserve the right to change specification without notice.



Your Partner In Power



MP60/MP66E





Sound Attenuated Enclosure: Features

Sound attenuated enclosures are manufactured from heavy gauge galvanised sheet steel (polyester powder painted for rust-proofed protection).

The enclosures are fitted with extra-thick, high-density acoustic grade foam for superior performance. Access is provided by wide aperture lockable doors with corrosion resistant fasteners used throughout.

The residential silencer is mounted internally for enhanced performance and heavy-duty lifting eyes are provided on the baseframe.

- ▶ Polyester powder coated baseframe with earth stud
- ▶ Vibration isolators between genset and base
- ▶ Fuel tank with filler cap
- ▶ Flexible fuel lines
- ▶ Fuel tank level gauge
- ▶ Fuel /water separator
- ▶ Exhaust Silencer with Exhaust manifold stub pipe
- ▶ Wiring loom /harness, 3-pole circuit breaker
- ▶ Battery rack and cables on base frame & Earth Strap
- ▶ Heavy duty starting battery /batteries (dry charged)
- ▶ Emergency stop lock-down pushbutton
- ▶ Operator's manual pack

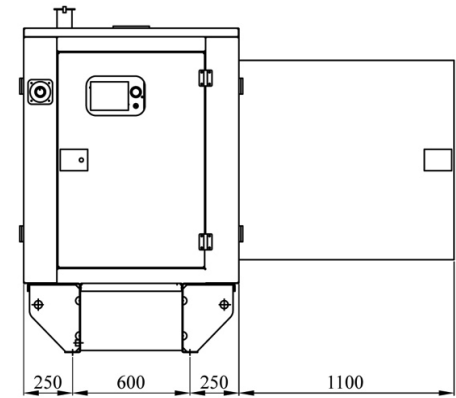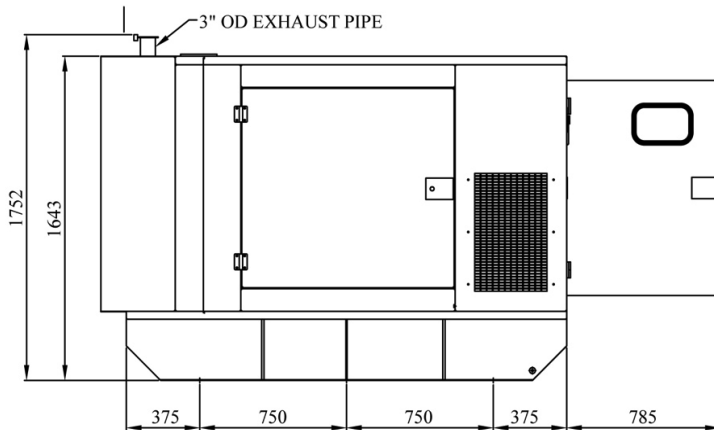

Dimensions

	(mm)	(in)
Length	2,250	88.6
Height	1,643	64.7
Width	1,100	43.3
Total Height to Exhaust Rain Cap	1,752	69.0
Max. Horizontal Projection of Rear Door	785	30.9
Max. Horizontal Projection of Side Doors	1,100	43.3

Sound Pressue Levels

	50Hz	60Hz
15m, 75% Load: (dBA)	57.1	59.0
15m, 100% Load: (dBA)	58.0	59.9
7m, 75% Load: (dBA)	63.1	65.2
7m, 100% Load: (dBA)	64.0	66.1
1m, 75% Load: (dBA)	73.1	75.5
1m, 100% Load: (dBA)	73.3	75.7

Weights

	(kg)	(lbs)
Dry (with Lube Oil)	1,397	3,080

	(kg)	(lbs)
Wet (with Lube Oil and Coolant)	1,584	3,492

MP60/MP66E

Marapco Ltd

Tel / Fax : 0044 2893 355674

Website: www.Marapco.com

N. Ireland - UK

