



YOUR PARTNER IN POWER



ISO 9001:2008
FM 56710


JET GENERATORS ARE ASSEMBLED
IN FACILITIES CERTIFIED ISO 9001

C10A Enclosures

C10A - TECHNICAL DATA

GENSET MODEL	TOTAL LENGTH TL (A)	TOTAL WIDTH TW (B)	TOTAL HEIGHT TH (C)	WEIGHT kg	SOUND LEVELS - NO LOAD		SOUND LEVELS - 75% LOAD	
					1M	3M	1M	3M
JP250 1506 Series	608	160	265	3000	69	67	71	69
JP300 1506 Series	640	180	280	3500	69	67	71	69
JP350	676	204	287	4000	69	67	71	69
JP400	676	204	287	4000	69	67	71	69
JP450	676	204	287	4000	71	69	73	71
JP500	676	204	287	4000	71	69	73	71
JP600	700	215	252+70	5100	71	69	73	71
JP650	700	215	252+70	5100	71	69	73	71
JP750	726	228+20	253+75	5400	76	74	78	76
JP800	726	228+20	253+75	5400	76	74	78	76
JP1000	725	228+20	253+100	5500	84	81	86	83
JP1250	850	228+20	300+95	6500	84	82	86	84
JP1500	910	260	300+95	7000	84	82	86	84
JP1750	910	265	300+95	7000	86	84	88	86
JP2000	1050	330	387+100	14250	86	84	88	86

**Weight for enclosure only

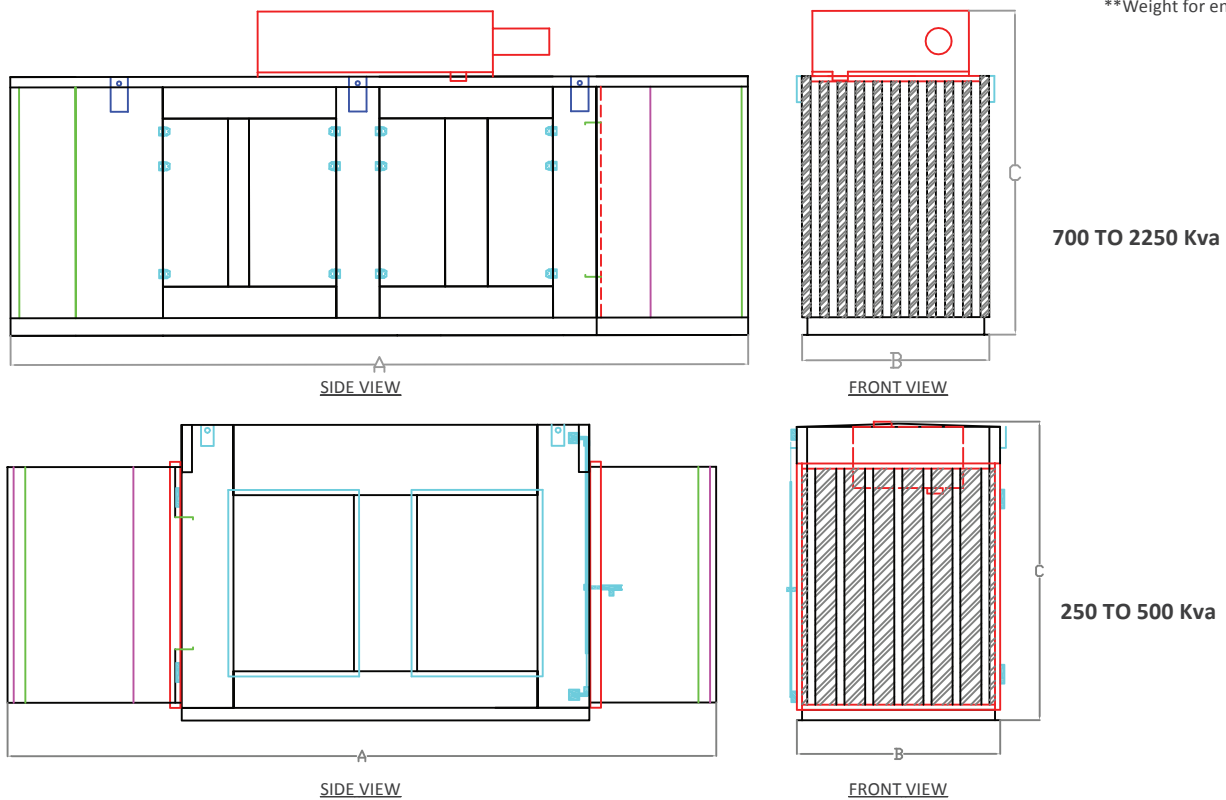

TECHNICAL SPECIFICATIONS

- Unique appearance with high sound absorbing and thermal properties
- Full weather proof enclosure and suitable operations in harsh conditions.
- Manufactured from galvanized metal sheet for doors & louvers.
- Heavy duty acoustical fireproof fiber used for general, thermal, and acoustic insulation, covered with galvanised perforated sheet for protection.
- Residential exhaust muffler to further decrease the sound level of the exhaust (mounted inside the enclosure up to 200 KVA as standard).
- Galvanized hinges & door locks / stainless steel door locks for 800 KVA as above.
- Polyurethane paint with resistant to sun radiations and various weather conditions.
- Internal emergency stop is standard with optional external emergency stop.
- Fully guarded cooling fan & battery charging alternator.
- Securely reachable fuel fill & battery via lockable access doors.
- Four lifting points for each set and 6 lifting points for 800 KVA & above for easy mobility.

All information in this document is substantially correct at time of printing and maybe altered subsequently.