

YOUR PARTNER IN POWER



ISO 9001:2008
FM 56710


JET GENERATORS ARE ASSEMBLED
IN FACILITIES CERTIFIED ISO 9001

C6A Enclosures


C6A - TECHNICAL DATA

GENSET MODEL	TOTAL LENGTH TL (A)	TOTAL WIDTH TW (B)	TOTAL HEIGHT TH (C)	WEIGHT kg	SOUND LEVELS - NO LOAD		SOUND LEVELS - 75% LOAD	
					1M	3M	1M	3M
JP13	246	85+10	156	550	68	64	70	66
JP15	246	85+10	156	550	68	64	70	66
JP20	246	85+10	156	550	68	64	70	66
JP27	272	100+10	206	780	72	66	73	70
JP30	272	100+10	206	780	72	66	73	70
JP45	272	100+10	206	780	73	67	74	69
JP60	272	100+10	206	780	73	67	74	69
JP80	299	100+10	206	910	75	71	77	73
JP100	299	100+10	206	910	79	75	81	77
JP135 1106 series	346	109+10	215	1000	80	76	82	78
JP150 1106 series	378	109+10	215	1200	81	77	83	79
JP180 1106 series	378	109+10	215	1200	81	77	83	79
JP200 1106 series	378	109+10	215	1200	81	77	83	79
JP250 1506 series	462	138+11	208+43	1650	82	78	84	80
JP300 1506 series	462	138+11	208+43	1650	82	78	84	80
JP400	512	145+14	246+52	2300	82	78	84	80
JP500	512	145+14	246+52	2300	82	78	84	80

**Weight for enclosure only

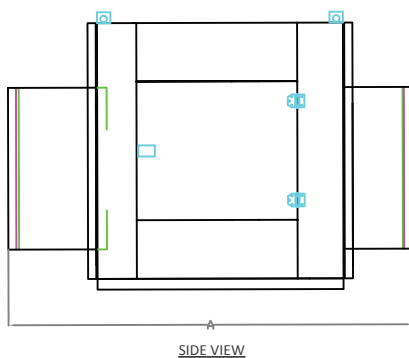

13 to 200 Kva

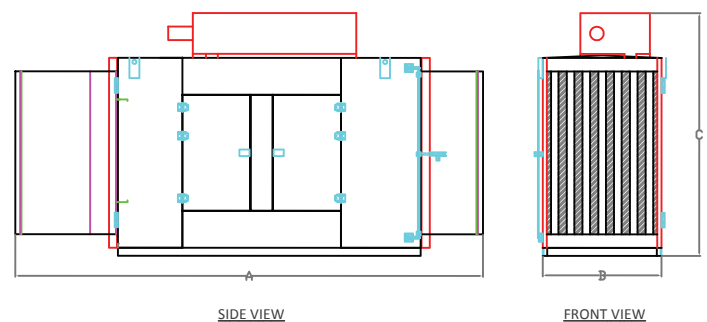

250 to 500 Kva

TECHNICAL SPECIFICATIONS

- Unique appearance with high sound absorbing and thermal properties
- Full weather proof enclosure and suitable operations in harsh conditions.
- Manufactured from galvanized metal sheet for doors & louvers.
- Heavy duty acoustical fireproof fiber used for general, thermal, and acoustic insulation, covered with galvanised perforated sheet for protection.
- Residential exhaust muffler to further decrease the sound level of the exhaust (mounted inside the enclosure up to 200 KVA as standard).
- Galvanized hinges & door locks / stainless steel door locks for 800 KVA as above.
- Polyurethane paint with resistant to sun radiations and various weather conditions.
- Internal emergency stop is standard with optional external emergency stop.
- Fully guarded cooling fan & battery charging alternator.
- Securely reachable fuel fill & battery via lockable access doors.
- Four lifting points for each set and 6 lifting points for 800 KVA & above for easy mobility.

All information in this document is substantially correct at time of printing and maybe altered subsequently.