Jet Generators

JGP725P1/JGP800E1

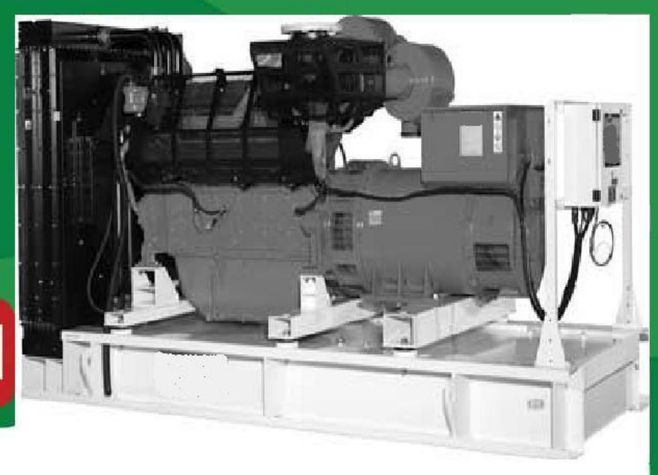

GENSET MODEL

	Prime	JGP725P1	
	Standby	JGP800E1	
Engine speed	rpm	1500	1800
Frequency	Hz	50	60
Prime power	KVA KW	725 580	
Standby power	KVA KW	800 640	
Gross Engine Power	KW hp	711 953	

*Ratings at 0.8 Power Factor

Fuel consumption @50% load	L/hr	81.6	
@75% load	L/hr	114.8	
@100% load	L/hr	149.8	

TECHNICAL DATA

Perkins Engine Model	4006TAG2A	
Leroy Somer Alternator Model	LSA49.1M6	
Number of Cylinders	6 in Line	
Cubic Capacity	Litres	22.9
	cu.in	1398.7
Bore	mm	160
	in	6.3
Stroke	mm	190
	in	7.5
Fuel Tank Capacity	Lit	1200

DIMENSIONS & WEIGHT

Length	cm	428
Width	cm	191
Height	cm	228
weight	Kg	6170

Prime rating: These ratings are applicable for supplying continuous electrical power in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours

Standby Rating: These ratings are applicable for supplying continuous electricalpower in the event of utility power failure. No overload is permitted on these ratings

Headquarter
Jubaili Bldg,
Maarouf Saad Boulevard
P.O. Box 60, Sidon, **Lebanon**
Tel: +961 7 730871
www.JubailiBros.com

JUBAILI BROS
جبيلي اخوان