




JGP400P5 / JGP450E5

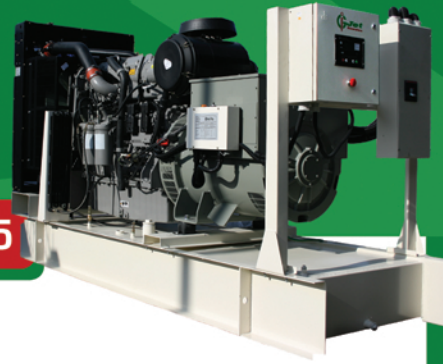

GENSET MODEL

	Prime	JGP400P5	
	Standby	JGP450E5	
Engine speed	rpm	1500	1800
Frequency	Hz	50	60
Prime power	KVA KW	400 320	438 350.4
Standby power	KVA KW	450 360	500 400
Gross Engine Power	KW hp	412.5 553	460.7 618
* Ratings at 0.8 Power Factor			
Fuel consumption @50% load	L/hr	44.9	52.3
@75% load	L/hr	63.7	73.5
@100% load	L/hr	81.6	92.8

TECHNICAL DATA

Perkins Engine Model	2206A-E13TAG3	
Leroy Somer / Stamford Alternator Model	LSA47.2S4/HCI444F	
Number of Cylinders	6 in line	
Cubic Capacity	Litres	12.5
	cu.in	762.8
Bore	mm	130
	in	5.1
Stroke	mm	157
	in	6.2
Fuel Tank Capacity	Lit	600

DIMENSIONS & WEIGHT

Length	cm	325
Width	cm	112
Height	cm	207
weight	Kg	3503

Prime rating: These ratings are applicable for supplying continuous electrical power in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours

Standby Rating: These ratings are applicable for supplying continuous electrical power in the event of utility power failure. No overload is permitted on these ratings

Headquarter
Jubaili Bldg,
Maarouf Saad Boulevard
P.O. Box 60, Sidon, Lebanon
Tel: +961 7 730871
www.JubailiBros.com

