



MP681-MP750E

Since 1994 Marapco Generating Sets have provided reliable, dependable and trustworthy power solutions for the global market. Marapco Generating Sets combine quality and performance to deliver a superior product, making Marapco a market leading Generating Set throughout the Middle East, Asia & Africa.

Generator Output Rating at - 60Hz					
220/127V	KVA	KW			
Prime	681.0	544.8			
Standby	750.0	600.0			
		@ 0.8 p.f.			
Generator Out	out Rating at	- 60Hz			
380/220V	KVA	KW			
Prime	602.0	481.6			
Standby	667.0	533.6			
		@ 0.8 p.f.			
Engine Data					
Engine Manufacturer: Perkins Seguin					
Engine Model:	06A-E18TAG3				
Number of Cylind	ders:	6			
Cylinder Arrange	ment: Ve	ertical In Line			
Cycle:		4 Stroke			
Bore/Stroke mm	(in): 145.0	(5.7) / 183.0 (7.2)			
Induction:		arged & air - to - air narge cooled			
Compression rati	o:	14.5:1			
Displacement / (c	u.in): 1	8.1 (1104.5)			

General Data				
	Liter	US/Gal		
Fuel Tank Capacity:	1050.0	277.0		
Fuel Tank:	Powder Co	Powder Coated Steel		
Base Frame:	Heavy Duty-Po	Heavy Duty-Powder Coated		
Control Panel:	Deep Sea E	Deep Sea Electronics		
Circuit Breaker:	ABB 3 Po	ABB 3 Pole MCB		

Performance	60HZ			
Engine Speed:	180	1800		
Gross Engine Power:	kWm	Bhp		
Prime:	617.5	828.1		
Standby:	678.2	909.5		
Fuel Consumption:	L/Hr	US Gal/Hr		
Prime:	144	38.0		
Standby:	157	41.5		

Standard Reference Conditions:

Output ratings are presented at normal conditions of temperature and pressure. This generator set is designed to operate in high ambient temperatures and altitudes.

Please consult your dealer for specific site ratings.

Dimensions and Weights

Len	gth	Wic	lth	Hei	ght	[Dry		Wet
Millimeter	Inch	Millimeter	Inch	Millimeter	Inch	KG	LB	KG	LB
3919.0	154.3	1536.0	60.5	2229.0	87.8	4452.0	9815.0	4560.0	10052.1

* With Lube Oil & Coolant

Rating Definition



These rating are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours.



These rating are applicable for supply continuous electrical power (at variable load) in the event of utility power failure. No *overload is permitted on these ratings. The* alternator model is peak continuous rated (as *defined in ISO 8528-3*)

Air Flow	60Hz		
	M³/min	Ft³/min	
Combustion Air Flow:	50.5	1783.4	
Exhaust Gas Flow:	135.7	4792.2	
Radiator Cooling: Air Flow	852.0	30088	

^{*}Cooling system designed to operate in high ambient conditions

Alternator Data Alternator Manufacturer: **Leroy Somer Alternator Model:** LSA47.2L9 **Number of Bearings:** Single (1) **Insulation Class:** Н **Total Harmonic Content:** <1.5% Wires: 6 IP 23 **Ingress Protection Rating: Excitation System:** Shunt **Winding Pitch Code:** 2/3 - 6S



Perkins manufactures diesel engines and power solutions to the highest levels of performance and reliability. MARAPCO incorporates this engine throughout their full range.




Leroy Somer is a world leader in the manufacturing of power generation, combining quality with performance to produce a market leading alternator for MARAPCO.



Deep Sea Electronics control modules deliver unrivaled functionality and performance. MARAPCO generating sets use this latest technology to its full potential.

 $Logos\ and\ Brands\ of\ Perkins,\ Leroy\ Somer,\ ABB\ \&\ Deep\ Sea\ Electronics\ \ are\ registered\ Trademarks$

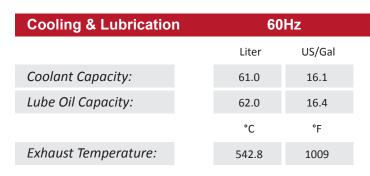



Other Information

Generating Set Standards

This generating set meets the following standards: ISO8528, BS4999, BS5514, IEC60034, VDE0530

Warranty

This generator is covered against manufacturing and workmanship defects. Kindly refer to warranty statement for more details.

Picture shown in leaflet may include optional accessories, all data is correct at the time of process and we reserve the right to change specification without prior notice

Distributed & Serviced by:



2804/2020